


# The Light Source

## Mega-Quick Pipe Splice

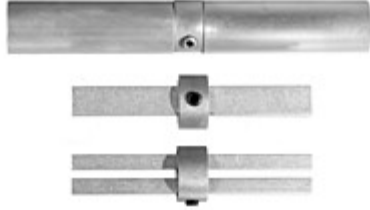

Quickly joins two pipes in line together without drilling or threading for permanent or temporary installations. The Mega-Quick Pipe Splice is the same outside diameter as the pipe for a nice flush look and feel. Install by loosening the set screw one half turn with a quarter inch hex key to open the splice. Align the set screw so that it will be on the side of the pipe joint. (This will give the maximum strength to the joint.) Pinch the bars together at one end, and insert the splice into the first pipe. Then pinch the other ends of splice together and insert the splice into the second pipe. Slide the pipes tightly toward the splice and tighten the set screw securely with the one quarter inch hex key. Bolts should be tightened to about 30 foot pounds.

For 1 1/2" pipe in black or mill, schedule 40 or schedule 80. Also available for 1 1/4" pipe in schedule 40. Weight one pound.

Please note: Not to be used in a counterweight system or any other system where the pipes have the ability to move.  
Not a structural component

**Working Load Limit** Not rated for structural use

**Hardware** 1/2-13 socket set screw

**Dimensions** 8.25" in total length  
Piece in middle is 1" wide

**Weight** 15 oz.

**Case Quantities** 12